



From,  
Chairperson

# Office of the Board of Councillors BELDANGA MUNICIPALITY

P.O. BELDANGA, PIN-742133, DT. MURSHIDABAD



Phone & Fax: - Off. - 264113

E-Mail ID :- [beldanga.municipality@gmail.com](mailto:beldanga.municipality@gmail.com)

Website :- [www.municipalitybeldanga.org](http://www.municipalitybeldanga.org)

Memo No. .... 2171/11-1/23 .....

Dated ... 19/07/23 .....

## Quotation Notice

Sealed quotations are invited from the recognized agency having experience in similar type of works listed below under Beldanga Municipality.

### List of Works


| Sl. No. | Name of Work  | Estimated Amount |
|---------|---|------------------|
| 1       | Construction of concrete road from house of Sankar Nandi towards Nitai Pramanik at Tili Para under Ward No. 11 in Beldanga Municipality, Murshidabad.               | 60733.00         |
| 2       | Construction of Drain from Nanda Mukherjee house to Akash Bhattacharjee in Chatterjee para under Ward No. 11 in Beldanga Municipality, Murshidabad.                 | 98983.00         |
| 3       | Construction of concrete road from house of Nanda Mukherjee towards Akash Bhattacharjee at Chatterjee Para under Ward No. 11 in Beldanga Municipality, Murshidabad. | 67099.00         |
| 4       | Construction of concrete road from house of Wajul Sk towards Najir Sk at Sarder Para under Ward No. 11 in Beldanga Municipality, Murshidabad.                       | 60474.00         |

### TERMS AND CONDITION ARE AS UNDER

1. The agency who agreed to participate in the quotation, will have to submit their rate in their letter head along with valid up to date certificate of GST Registration, Current GST return, P. Tax Challan, Valid Trade License, and PAN Card including copy of estimate signed by the participant.
2. Payment will be made through Account payee cheque or online.
3. Tax will be deducted as per running rule.
4. The Prospective Bidder shall have to execute the work in such a manner so that appropriate service level of the work is maintained during progress of work and a period of 1 (one) year from the date of successful completion of the work to the entire satisfaction of the Engineer-in-Charge. If any defect / damage is found during the period as mentioned above, the contractor shall make the same good at his own cost to the specification at par with instant project work. On failure to do so, penal action against the contractor will be imposed by the Department as deem fit. The contractor may quote his rate considering the above aspect. Refund of Security Deposit will only be made after successful maintaining of appropriate service level of the work as mentioned below:
  - Full security deposit shall be refunded to the contractor on expiry of one year from the actual date of completion of the work.

5. Supplied item will be rejected if it is not as per specification or bellow standard.
6. The entire work must be completed within 15 days from the received of the work order.
7. The Board of Councillors reserves the right to accept or reject any quotation without assigning any reasons whatsoever.
8. Other terms and condition will be followed as per rule.
9. Quotation will be received upto 1-30 PM on 28.07.2023 and opening will be done at 2-30 PM on 28.07.2023
10. The agency or their representative may remain present at time of opening.

**N.B.** Recovery of 1% (one percent) Cess on Gross bills to be made as per Regulation of Employment & Conditions Service Act. 1996.


  
Chairperson  
Beldanga Municipality

Memo No. 2171(6)/11-1/23

Dated 19/07/23

Copy forwarded for information and wide publication to :-


1. The District Magistrate, Murshidabad.
2. The Sub-Divisional Officer, Berhampore, Murshidabad.
3. The Block Development Officer, Beldanga-1, Beldanga, Murshidabad.
4. The F.O., Beldanga Municipality.
5. The E.O., Beldanga Municipality.
6. IT Co-ordinator, Beldanga Municipality with request to float this Notice to the official website of Beldanga Municipality ([www.municipalitybeldanga.org](http://www.municipalitybeldanga.org)).

  
Chairperson  
Beldanga Municipality

Beldanga Municipality  
Murshidabad

Estimate for

Construction of Concrete road from house of Sankar Nandi towards Nitai Pramanik at Tili Para under ward no.11 in Beldanga Municipality, Murshidabad.

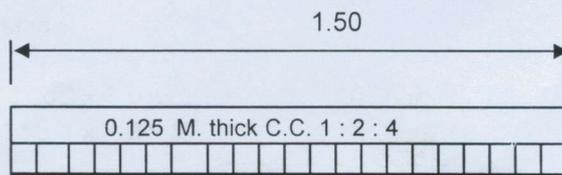

Cross section of road

Not to Scale

Road Length = 30.00 Meter

Road Works PWD (WB)

Page- 240 , Item- 3.16

- 1 Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer-in-charge including uprooting and removing plants and jungles when and where necessary.

(a) Depth up to 150 mm.

|      |                   |   |                      |       |                        |                     |
|------|-------------------|---|----------------------|-------|------------------------|---------------------|
| Road | 1 x 30.00 x 1.500 | = | 45.00 Sqm            |       |                        |                     |
|      |                   |   | <del>45.00 Sqm</del> | @ Rs. | <del>14.40 / Sqm</del> | <del>₹ 648.00</del> |

Road Works PWD (WB)

Page- 14 , Item- 1 , 3rd Corrigenda

- 2 Laying one layer brick flat soling with picked or 1st class bricks including all complete.

|      |                   |   |                      |       |                         |                        |
|------|-------------------|---|----------------------|-------|-------------------------|------------------------|
| Road | 1 x 30.00 x 1.500 | = | 45.00 Sqm            |       |                         |                        |
|      |                   |   | <del>45.00 Sqm</del> | @ Rs. | <del>326.00 / Sqm</del> | <del>₹ 14,670.00</del> |

Road Works PWD (WB)

Page- 24 , Item- 4

- 3 Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes.

a) Pakur Variety

|      |                          |   |                     |       |                          |                        |
|------|--------------------------|---|---------------------|-------|--------------------------|------------------------|
| Road | 1 x 30.00 x 1.50 x 0.125 | = | 5.63 Cum            |       |                          |                        |
|      |                          |   | <del>5.63 Cum</del> | @ Rs. | <del>5359.18 / Cum</del> | <del>₹ 30,172.18</del> |

- 4 Hire and labour charges for shuttering with centering and necessary staging upto 4 m using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams and columns, lintels curved or straight including fitting, fixing and striking out after completion of works (upto roof of ground floor)

(f) 25 mm to 30 mm shuttering without staging in foundation

|      |                   |   |                 |                    |            |
|------|-------------------|---|-----------------|--------------------|------------|
| Road | 2 x 30.00 x 0.125 | = | 7.50 Sqm        |                    |            |
|      | 6 x 1.50 x 0.125  | = | 1.13 Sqm        |                    |            |
|      |                   |   | <u>8.63 Sqm</u> | @ Rs. 205.00 / Sqm | ₹ 1,769.15 |

Road Works PWD (WB)

Page- 270 , Item- 8.07

- 5 Providing & fixing Concrete Sign Board as per IRC specification of size 900 x 750 x 37 mm. thick made with RCC 1:1½:3 with pakur variety stone chips reinforced with double layer IRC fabric (75 x 75 mm. mesh) and fixed with necessary nuts & bolts on two RC precast posts 100 mm. x 150 mm. of height 2.65 m. of which top 750 mm. is of section 100 x 13 mm. and 1.90 metre above GL & 0.75 metre below GL including digging hole, repacking the same with cement concrete 1:3:6 with jhama khoa or with local stone chips etc. complete including painting two coats on both faces lettering sign marks etc. as per direction of the Engineer-in-Charge. (The rate is inclusive of cost of reinforcement, concrete, shuttering, nuts & bolts, washer etc. complete.)

|   |                             |     |           |
|---|-----------------------------|-----|-----------|
| = | 1 Each @ Rs. 2230.00 / Each | ₹   | 2,230.00  |
|   |                             | ₹   | 49,489.33 |
|   | Add G.S.T. @ 18%            | = ₹ | 8,908.08  |
|   |                             | ₹   | 58,397.41 |
|   | Labour Welfare Cess @ 1%    | = ₹ | 583.97    |
|   |                             | ₹   | 58,981.38 |
|   | Contingency @ 3%            | = ₹ | 1,751.92  |
|   |                             | ₹   | 60,733.30 |
|   | Say =                       | ₹   | 60,733.00 |

#

**VETTED**  
The estimated vetted  
by me according to  
the BOC meeting no.22  
Dated 27/06/2023

*[Signature]*  
18/07/2023  
S.A.E.  
Beldanga Municipality


*[Signature]*  
(Anuradha Hazra Banerjee)  
Chairperson  
Beldanga Municipality

S.A.E.  
Beldanga Municipality

**Beldanga Municipality**  
**Murshidabad**

**Estimate for**

**Construction of Drain from Nanda Mukherjee House to Akash Bhaterjee in Chaterjee para under Ward No.- 11 in Beldanga Municipality, Murshidabad.**

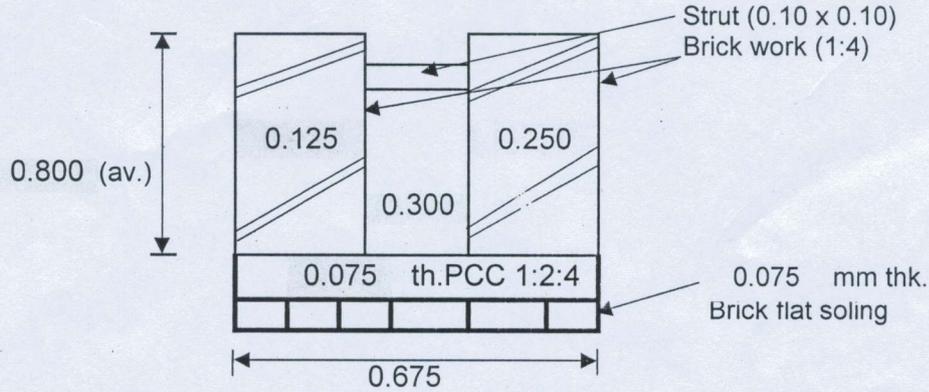

**Cross section of Drain**

Not to Scale

Drain Length = 29.50 Meter

Building Works PWD (WB)

Page- 1 , Item- 2

- 1 Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75 m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete.

(a) Depth of excavation not exceeding 1,500 mm.

Drain 1 x 29.50 x 0.675 x 0.950 (av.) =  $\frac{18.92 \text{ Cum}}{18.92 \text{ Cum}}$  @ Rs. 119.27 / Cum ₹ 2,256.59

Building Works PWD (WB)

Page- 14 , Item- 1 , 3rd Corrigenda

- 2 Laying one layer brick flat soling with picked or 1st class bricks including all complete.

Drain 1 x 29.50 x 0.675 =  $\frac{19.91 \text{ Sqm}}{19.91 \text{ Sqm}}$  @ Rs. 326.00 / Sqm ₹ 6,490.66

- 3 Providing & laying cement concrete(1 : 2 : 4) with graded stone chips. (20mm nominal size)

Drain 1 x 29.50 x 0.675 x 0.075 =  $\frac{1.49 \text{ Cum}}{1.49 \text{ Cum}}$  @ Rs. 5359.18 / Cum ₹ 7,985.18

Building Works PWD (WB)

Page- 15 , Item- 7 , 3rd Corrigenda

- 4 Brick work with 1st class bricks in cement mortar (1:6)

(a) In foundation and plinth

Drain 1 x 29.50 x 0.250 x 0.800 =  $\frac{5.90 \text{ Cum}}{5.90 \text{ Cum}}$  @ Rs. 4882.70 / Cum ₹ 28,807.93

Building Works PWD (WB)

Page- 16 , Item- 16 , 3rd Corrigenda

- 5 125 mm. thick brick work with 1st class bricks in cement mortar (1:4) in ground floor

Drain 1 x 29.50 x 0.800

= 23.60 Sqm

23.60 Sqm @ Rs. 669.48 / Sqm ₹ 15,799.73

Road Works PWD (WB)

Page- 42 , Item- 36

- 6 Hire and labour charges for shuttering with centering and necessary staging upto 4 m using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams and columns, lintels curved or straight including fitting, fixing and striking out after completion of works (upto roof of ground floor)

(f) 25 mm to 30 mm shuttering without staging in foundation

Drain 2 x 29.50 x 0.075 = 4.43 Sqm

Slab 6 x 0.75 x 0.675 = 3.04 Sqm

12 x 0.75 x 0.150 = 1.35 Sqm

12 x 0.68 x 0.150 = 1.22 Sqm

10.04 Sqm @ Rs. 205.00 / Sqm ₹ 2,058.20

Building Works PWD (WB)

- 7 Ordinary Cement concrete (mix 1:1.5:3) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement if any, in ground floor as per relevant IS codes.

(i) Pakur Variety

Slab 6 x 0.75 x 0.68 x 0.150 = 0.46 Cum

0.46 Cum @ Rs. 5853.02 / Cum ₹ 2,692.39

Building Works PWD (WB)

Page- 43 , Item- 40 , 10th Corrigenda

- 8 Reinforcement for reinforced concrete work in all sorts of structures including distribution bars, stirrups, binders etc initial straightening and removal of loose rust (if necessary), cutting to requisite length, hooking and bending to correct shape, placing in proper position and binding with 16 gauge black annealed wire at every intersection, complete as per drawing and direction.

(i) Tor steel/Mild Steel

II. JSW/JSPL/SHYAM/  
SRMB/BMASL/ELECROSTEEL/SSL

Slab 1.00% of Cement concrete 1:1.5:3 voloum = 0.040 Mt @ Rs. 55394.00 / Mt ₹ 2,215.76

Building Works PWD (WB)

Page- 189 , Item- 1 , 3rd Corrigenda

Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints including throating, nosing and drip course, scaffolding/staging where necessary (Ground floor).[Excluding cost of chipping over concrete surface]

- (i) With 1:6 cement mortar  
(b) 15 mm thick plaster

Drain 1 x 29.50 x 2.430 = 71.69 Sqm  
71.69 Sqm @ Rs. 139.53 / Sqm ₹ 10,002.91

Building Works PWD (WB)


Page- 192 , Item- 15

- 10 Neat cement punning about 1.5mm thick in wall, dado, window sill, floor etc. NOTE:Cement 0.152 cu.m per100 sq.m.

Same as area of plaster at sl.no. 9 = 71.69 Sqm  
71.69 Sqm @ Rs. 32.75 / Sqm ₹ 2,347.85

|                     |   |     |   |   |           |
|---------------------|---|-----|---|---|-----------|
|                     |   |     |   | ₹ | 80,657.20 |
| Add G.S.T.          | @ | 18% | = | ₹ | 14,518.30 |
|                     |   |     |   | ₹ | 95,175.50 |
| Labour Welfare Cess | @ | 1%  | = | ₹ | 951.76    |
|                     |   |     |   | ₹ | 96,127.26 |
| Contingency         | @ | 3%  | = | ₹ | 2,855.27  |
|                     |   |     |   | ₹ | 98,982.53 |
| Say                 | = |     |   | ₹ | 98,983.00 |

Rupees NinetyEight Thousand Nine Hundred EightyThree Only

  
S.A.E.  
Beldanga Municipality

  
(Anuradna Hazra Banerjee)  
Chairperson  
Beldanga Municipality

**VETTED**


The estimated vetted  
by me accordingly by the  
B.O.C meeting no.22  
dated 27/06/2023

  
18/07/2023  
S.A.E.  
Beldanga Municipality

Beldanga Municipality  
Murshidabad

Estimate for

Construction of Concrete road from house of Nanda Mukherjee towards Akash Bhatteerjee at Chatterjee Para under ward no.11 in Beldanga Municipality, Murshidabad.

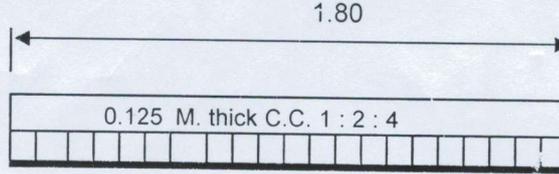

Cross section of road

Not to Scale

Road Length = 28.00 Meter

Road Works PWD (WB)

Page- 240 , Item- 3.16

- 1 Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer-in-charge including uprooting and removing plants and jungles when and where necessary.

(a) Depth up to 150 mm.

|      |                   |   |                  |       |             |          |
|------|-------------------|---|------------------|-------|-------------|----------|
| Road | 1 x 28.00 x 1.800 | = | 50.40 Sqm        |       |             |          |
|      |                   |   | <u>50.40 Sqm</u> | @ Rs. | 14.40 / Sqm | ₹ 725.76 |

Road Works PWD (WB)

Page- 14 , Item- 1 , 3rd Corrigenda

- 2 Laying one layer brick flat soling with picked or 1st class bricks including all complete.

|      |                   |   |                  |       |              |             |
|------|-------------------|---|------------------|-------|--------------|-------------|
| Road | 1 x 28.00 x 1.800 | = | 50.40 Sqm        |       |              |             |
|      |                   |   | <u>50.40 Sqm</u> | @ Rs. | 326.00 / Sqm | ₹ 16,430.40 |

Road Works PWD (WB)

Page- 24 , Item- 4

- 3 Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes.

a) Pakur Variety

|      |                          |   |                 |       |               |             |
|------|--------------------------|---|-----------------|-------|---------------|-------------|
| Road | 1 x 28.00 x 1.80 x 0.125 | = | 6.30 Cum        |       |               |             |
|      |                          |   | <u>6.30 Cum</u> | @ Rs. | 5359.18 / Cum | ₹ 33,762.83 |

- 4 Hire and labour charges for shuttering with centering and necessary staging upto 4 m using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams and columns, lintels curved or straight including fitting, fixing and striking out after completion of works (upto roof of ground floor)

(f) 25 mm to 30 mm shuttering without staging in foundation

|      |                   |   |                 |                    |            |
|------|-------------------|---|-----------------|--------------------|------------|
| Road | 2 x 28.00 x 0.125 | = | 7.00 Sqm        |                    |            |
|      | 2 x 1.80 x 0.125  | = | 0.45 Sqm        |                    |            |
|      |                   |   | <u>7.45 Sqm</u> | @ Rs. 205.00 / Sqm | ₹ 1,527.25 |

- 5 Providing & fixing Concrete Sign Board as per IRC specification of size 900 x 750 x 37 mm. thick made with RCC 1:1½:3 with pakur variety stone chips reinforced with double layer IRC fabric (75 x 75 mm. mesh) and fixed with necessary nuts & bolts on two RC precast posts 100 mm. x 150 mm. of height 2.65 m. of which top 750 mm. is of section 100 x 13 mm. and 1.90 metre above GL & 0.75 metre below GL including digging hole, repacking the same with cement concrete 1:3:6 with jhama khoa or with local stone chips etc. complete including painting two coats on both faces lettering sign marks etc. as per direction of the Engineer-in-Charge. (The rate is inclusive of cost of reinforcement, concrete, shuttering, nuts & bolts, washer etc. complete.)

|   |                          |      |             |
|---|--------------------------|------|-------------|
| = | 1 Each @ Rs. 2230.00 /   | Each | ₹ 2,230.00  |
|   |                          |      | ₹ 54,676.24 |
|   | Add G.S.T. @ 18%         | =    | ₹ 9,841.72  |
|   |                          |      | ₹ 64,517.96 |
|   | Labour Welfare Cess @ 1% | =    | ₹ 645.18    |
|   |                          |      | ₹ 65,163.14 |
|   | Contingency @ 3%         | =    | ₹ 1,935.54  |
|   |                          |      | ₹ 67,098.68 |
|   | Say =                    | ₹    | 67,099.00   |

#

**VETTED**  
The estimated vetted  
by me accordingly by  
the BOC meeting no.22  
dated 27/06/2023

*[Signature]*  
18/07/2023  
S.A.E.  
Beldanga Municipality


*[Signature]*  
S.A.E.  
Beldanga Municipality

*[Signature]*  
(Anuradha Hazra Banerjee)  
Chairperson  
Beldanga Municipality

Beldanga Municipality  
Murshidabad

Estimate for

Construction of Concrete road from house of wajul Sk towards Najir Sk at Sarder Para under ward no.11 in Beldanga Municipality, Murshidabad.

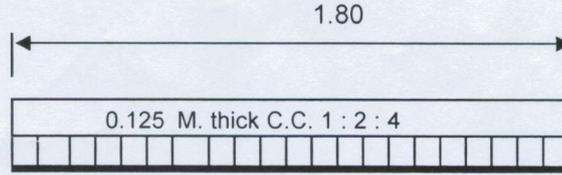

Cross section of road

Not to Scale

Road Length = 25.00 Meter

Road Works PWD (WB)

Page- 240 , Item- 3.16

- 1 Box cutting or filling in Road embankment in all sorts of soil including spreading the spoils properly over the flank as necessary or on berm to approximate grade & camber and rolling the sub-grade with power roller to proper camber and grade as per direction and satisfaction of Engineer-in-charge including uprooting and removing plants and jungles when and where necessary.

(a) Depth up to 150 mm.

Road  $1 \times 25.00 \times 1.800 = 45.00 \text{ Sqm}$   
 $\frac{45.00 \text{ Sqm}}{45.00 \text{ Sqm}} @ \text{Rs. } 14.40 / \text{ Sqm } ₹ 648.00$

Road Works PWD (WB)

Page- 14 , Item- 1 , 3rd Corrigenda

- 2 Laying one layer brick flat soling with picked or 1st class bricks including all complete.

Road  $1 \times 25.00 \times 1.800 = 45.00 \text{ Sqm}$   
 $\frac{45.00 \text{ Sqm}}{45.00 \text{ Sqm}} @ \text{Rs. } 326.00 / \text{ Sqm } ₹ 14,670.00$

Road Works PWD (WB)

Page- 24 , Item- 4

- 3 Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes.

a) Pakur Variety

Road  $1 \times 25.00 \times 1.80 \times 0.125 = 5.63 \text{ Cum}$   
 $\frac{5.63 \text{ Cum}}{5.63 \text{ Cum}} @ \text{Rs. } 5359.18 / \text{ Cum } ₹ 30,172.18$

- 4 Hire and labour charges for shuttering with centering and necessary staging upto 4 m using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams and columns, lintels curved or straight including fitting, fixing and striking out after completion of works (upto roof of ground floor)

(f) 25 mm to 30 mm shuttering without staging in foundation

|      |                   |   |                 |                    |            |
|------|-------------------|---|-----------------|--------------------|------------|
| Road | 2 x 25.00 x 0.125 | = | 6.25 Sqm        |                    |            |
|      | 6 x 1.80 x 0.125  | = | 1.35 Sqm        |                    |            |
|      |                   |   | <u>7.60 Sqm</u> | @ Rs. 205.00 / Sqm | ₹ 1,558.00 |

- 5 Providing & fixing Concrete Sign Board as per IRC specification of size 900 x 750 x 37 mm. thick made with RCC 1:1½:3 with pakur variety stone chips reinforced with double layer IRC fabric (75 x 75 mm. mesh) and fixed with necessary nuts & bolts on two RC precast posts 100 mm. x 150 mm. of height 2.65 m. of which top 750 mm. is of section 100 x 13 mm. and 1.90 metre above GL & 0.75 metre below GL including digging hole, repacking the same with cement concrete 1:3:6 with jhama khoa or with local stone chips etc. complete including painting two coats on both faces lettering sign marks etc. as per direction of the Engineer-in-Charge. (The rate is inclusive of cost of reinforcement, concrete, shuttering, nuts & bolts, washer etc. complete.)

|   |                             |     |           |
|---|-----------------------------|-----|-----------|
| = | 1 Each @ Rs. 2230.00 / Each | ₹   | 2,230.00  |
|   |                             | ₹   | 49,278.18 |
|   | Add G.S.T. @ 18%            | = ₹ | 8,870.07  |
|   |                             | ₹   | 58,148.25 |
|   | Labour Welfare Cess @ 1%    | = ₹ | 581.48    |
|   |                             | ₹   | 58,729.73 |
|   | Contingency @ 3%            | = ₹ | 1,744.45  |
|   |                             | ₹   | 60,474.18 |
|   | Say =                       | ₹   | 60,474.00 |

#

**VETTED**

The estimated vetted  
by me according to  
the BOC meeting no.22  
dated. 27/06/2023

*[Signature]*  
18/07/2023

**S.A.E.**  
Beldanga Municipality

*[Signature]*  
**S.A.E.**  
Beldanga Municipality

*[Signature]*  
(Anuradha Hazra Banerjee)  
Chairperson  
Beldanga Municipality