



Office of the Board of Councillors  
**BELDANGA MUNICIPALITY**

P.O. BELDANGA, PIN-742133, DT. MURSHIDABAD



Phone & Fax: - Off. - 264113

E-Mail ID :- [beldanga.municipality@gmail.com](mailto:beldanga.municipality@gmail.com)

Website :- [www.municipalitybeldanga.org](http://www.municipalitybeldanga.org)

From,  
Chairperson

Memo No. 2243/4-1/23

Dated ... 25/07/2023

**Quotation Notice**

Sealed quotations are invited from the recognized agency having experience in similar type of works listed below under Beldanga Municipality.

**List of Works**

Sl. No.	Name of Work	Estimated Amount
1	Rejuvenation of water body namely "Bathangor" at Chhutarpara, Ward No. 07 within Municipal area	35876.00
2	Cleaning and removing conservancy garbage from 1) Rafiqul Hasan towards Fulbastala more, Ward No. 4 & 9, 2) Sumannagar jora talgach towards Panchayat culvert, Ward No. 14 under Beldanga Municipality, Murshidabad	97931.00
3	Cleaning and removing conservancy garbage from 1) Sakharipara towards Darjipara, Ward No. 8 & 9 under Beldanga Municipality, Murshidabad.	96930.00
4	Construction of Shed at Sahebpara Beldanga Municipal S.S.P School Land under Ward No. 10 in Beldanga Municipality, Mouza- Beldanga, Plot No. 1504, Khatian No. 4223, P.S. Beldanga, Dist. Murshidabad.	96879.00

**TERMS AND CONDITION ARE AS UNDER**

1. The agency who agreed to participate in the quotation, will have to submit their rate in their letter head (**as per the proforma annexed herewith**) along with valid up to date certificate of GST Registration, Current GST return, P. Tax Challan, Valid Trade License, and PAN Card including copy of estimate signed by the participant. Agency who wants to participate more than one work, will have to submit their quotations separately for each work.
2. Payment will be made through Account payee cheque or online.
3. Tax will be deducted as per running rule.
4. The Prospective Bidder shall have to execute the work in such a manner so that appropriate service level of the work is maintained during progress of work and a period of 1 (one) year from the date of successful completion of the work to the entire satisfaction of the Engineer-in-Charge. If any defect / damage is found during the period as mentioned above, the contractor shall make the same good at his own cost to the specification at par with instant project work. On failure to do so, penal action against the contractor will be imposed by the Department as deem fit. The contractor may quote his rate considering the above aspect.

Refund of Security Deposit will only be made after successful maintaining of appropriate service level of the work as mentioned below:

- Full security deposit shall be refunded to the contractor on expiry of one year from the actual date of completion of the work.
- 5. Supplied item will be rejected if it is not as per specification or bellow standard.
- 6. The entire work must be completed within 15 days from the received of the work order.
- 7. The Board of Councillors reserves the right to accept or reject any quotation without assigning any reasons whatsoever.
- 8. Other terms and condition will be followed as per rule.
- 9. Quotation will be received upto 1-30 PM on 04.08.2023 and opening will be done at 2-30 PM on 04.08.2023
- 10. The agency or their representative may remain present at time of opening.

**N.B.** Recovery of 1% (one percent) Cess on Gross bills to be made as per Regulation of Employment & Conditions Service Act. 1996.



*A. B. Roy*  
Chairperson  
Beldanga Municipality

Dated ... *25/07/2023* ...

Memo No. *2243(6)/II-1/23*

Copy forwarded for information and wide publication to :-

1. The District Magistrate, Murshidabad.
2. The Sub-Divisional Officer, Berhampore, Murshidabad.
3. The Block Development Officer, Beldanga-1, Beldanga, Murshidabad.
4. The F.O., Beldanga Municipality.
5. The E.O., Beldanga Municipality.
6. IT Co-ordinator, Beldanga Municipality with request to float this Notice to the official website of Beldanga Municipality ([www. municipalitybeldanga.org](http://www.municipalitybeldanga.org)).

*A. B. Roy*  
Chairperson  
Beldanga Municipality



## Quotation

To,  
The Chairperson,  
Beldanga Municipality.

Ref. : NIQ vide memo no. .... Dt. .... , Sl. No. ....

Name of Work Tendered	Amount Put to Tender	Rate Quoted by the Bidder (% above or less or at par)	Tendered Amount (Contract Price both in words & figures)

Yours faithfully

Date :

Signature of Participant with stamp (if any)

Beldanga Municipality  
Murshidabad



Rejuvenation of water body namely "Bathangor" at Chhutarpara, ward no - 07 within Municipal area  
BASED ON THE SCHEDULE OF RATES FOR ROAD & BRIDGE WORKS (VOLUME - III) OF PUBLIC WORKS  
DEPARTMENT, GOVERNMENT OF WEST BENGAL FOR 2018 (Effective from 30/08/2018)

Sl. No.	Description of items	Unit	Quantity	Rate	Amount
1	Earthwork in excavation from borrow pits (land owned/arranged by the Department) and depositing in layers of 250 mm. including breaking clods in embankment works and to fill up back of abutments, depressions and ruts with an initial lead up to 50 m and initial lift up to 1.5 m making bunds at top as directed dressing complete. (Borrow pit measurement)  Additional lift of 1.5 m 20.000 m x 20.000 m x 0.300 m = 120.000 CuM	CuM	120.000	250.85	30102.00

Total = 30102.00  
Add 18% for GST = 5418.36  
**35520.36**  
Add 1% for CESS = 355.2  
**35875.56**

Say Rs. 35876/-

(Rupees thirty five thousand eight hundred seventy six)

**VETTED**

The estimated vetted  
by me accordingly by  
the B.O.C. meeting No. 22  
dated. 27/06/2023

29/07/2023  
S.A.E.  
Beldanga Municipality

19/07/2023  
S.A.E.  
Beldanga Municipality

Chairman  
Beldanga Municipality

**BELDANGA MUNICIPALITY  
MURSHIDABAD**



**RATE ANALYSIS FOR EXCAVATION OF EARTH PER M3 INCLUDING CARRIAGE BASED ON THE SCHEDULE OF RATES FOR ROAD & BRIDGE WORKS (VOLUME – III) OF PUBLIC WORKS DEPARTMENT, GOVERNMENT OF WEST BENGAL FOR 2018 (Effective from 30/08/2018)**

a) Earth work in excavation from borrow pits (land owned/arranged by Deptt.) and depositing in layers of 250mm. including breaking clods in ordinary soils with an initial lead up to 50m. and initial lift up to 1.5m (Page No.- 237, Item No. 3.01/i)	=Rs. 89.90
b) Extra for every additional lift of 1.5 m or part thereof in all kind of soil. (Borrow pit measurement) [Page No.-237/Item No.- 3.03]	=Rs. 10.00
c) Carriage of earth over pucca road any distance up to 5.0Kms [Page No.-230/Item No.- 1]	=Rs. 124.00
d) Unloading at site [Page – 227/Item No.- 1.03/A/b]	=Rs. 26.95
<b>Total</b>	<b>=Rs.250.85</b>

**NOTE:-**

For loading, unloading and stacking [vide page no.- 227, item no. 1.03/b] =Rs 77.00  
Less 40.00% for loading & 25.00% for stacking (vide remarks on page no. 227) =Rs.50.05(-)  
**Net =Rs.26.95 /-**

*Shawaj*  
*S.A. 07/2023*  
**Beldanga Municipality**

**Beldanga Municipality**  
**Murshidabad**

**Estimate for**

**Cleaning and removing conservancy garbage from 1) Rafiqul Hasan towards Fulbastala more, ward no.4 & 9, 2) Suman nagar jora talgach towards Panchayat culvert, ward no.14 under Beldanga Municipality, Murshidabad.**

Building Works PWD (WB)

Page- 279 , Item- 12

- 1 Cleaning and removing conservancy garbage mixed with rubbish & other filthy materials from the road side flank, drain and compound including cutting, loading, unloading to and from truck or cart by Mathor labour & removing the same to any distance.

Rafiqul Hasan towards Fulbastala more, ward no.4 & 9

$$1 \times 600.00 \times 2.10 \times 0.90 = 1134.00 \text{ Cum}$$

Suman nagar jora talgach towards Panchayat culvert, ward no.14

$$1 \times 170.00 \times 1.80 \times 0.90 = 275.40 \text{ Cum}$$

$$\underline{1409.40 \text{ Cum}} @ \text{Rs. } 56.62 / \text{Cum} \text{ ₹ } 79,800.23$$

$$\text{₹ } 79,800.23$$

$$\text{Add G.S.T. @ } 18\% = \text{₹ } 14,364.04$$

$$\text{₹ } 94,164.27$$

$$\text{Labour Welfare Cess @ } 1\% = \text{₹ } 941.64$$

$$\text{₹ } 95,105.91$$

$$\text{Contingency @ } 3\% = \text{₹ } 2,824.93$$

$$\text{₹ } 97,930.84$$

$$\text{Say} = \text{₹ } 97,931.00$$

Rupees NinetySeven Thousand Nine Hundred ThirtyOne Only

  
(Anuradha Hazra Banerjee)  
Chairperson  
Beldanga Municipality

  
S.A.E.  
Beldanga Municipality

**VETTED**  
The estimate vetted by me  
accordingly by the B.O.C meeting  
no. 22 dated 27/08/2023

  
S.A.E.  
Beldanga Municipality

**Beldanga Municipality**  
**Murshidabad**

**Estimate for**  
**Cleaning and removing conservancy garbage from 1) Sakharipara towards**  
**Darjipara, ward no.8 & 9 under Beldanga Municipality, Murshidabad.**

Building Works PWD (WB)

Page- 279 , Item- 12

- 1) Cleaning and removing conservancy garbage mixed with rubbish & other filthy materials from the road side flank, drain and compound including cutting, loading, unloading to and from truck or cart by Mathor labour & removing the same to any distance.

1) Sakharipara towards Darjipara, ward no.8 & 9

$$1 \times 620.00 \times 2.50 \times 0.90 = 1395.00 \text{ Cum}$$

$$\frac{1395.00 \text{ Cum}}{1395.00 \text{ Cum}} @ \text{Rs. } 56.62 / \text{Cum} \text{ ₹ } 78,984.90$$

				₹	78,984.90
Add G.S.T.	@	18%	=	₹	14,217.28
				₹	93,202.18
Labour Welfare Cess	@	1%	=	₹	932.02
				₹	94,134.20
Contingency	@	3%	=	₹	2,796.07
				₹	96,930.27
Say	=			₹	96,930.00

Rupees NinetySix Thousand Nine Hundred Thirty Only

**VETTED**  
The estimate vetted by me  
accordingly by the B.O.C meeting  
no. 22 dated 27/08/2023

*[Signature]*  
21/07/2023  
S.A.E.  
Beldanga Municipality

*[Signature]*  
S.A.E.  
Beldanga Municipality

*[Signature]*  
(Anuradha Hazra Banerjee)  
Chairperson  
Beldanga Municipality

**BELDANGA MUNICIPALITY**  
**MURSHIDABAD**

SI-4

**Estimate for**

**Construction of Shed at Sahebpara Beldanga Municipal S.S.P School Land under ward no.10 in Beldanga Municipality, Mouza-Beldanga, Plot No. 1504, Khatian No. 4223, P.S- Beldanga, Dist-Murshidabad.**

Building Works PWD (WB)

Page - 1 , Item - 1

- 1 Earth work in excavation of foundation trenches in all shorts of soil (Including mixed soil but excluding laterite or sand stone) including removing spreading or stacking the spills within a leaden of 75 m sa directed. The item includes necessary trimming the sides of trenches, leveling, dressing and ramming the bottom bailing out water as required complete as required complete. (i) Depth of excavation not exceeding 1.5m.

$$2 \times 5.26 \times 0.625 \times 0.475 = 3.12 \text{ Cum}$$

$$2 \times 2.12 \times 0.625 \times 0.475 = 1.26 \text{ Cum}$$

4.38 Cum @ Rs. 119.27 / Cum Rs. 522.00

Building Works PWD (WB)

Page - 14 tem - 1

- 2 Single brick flat soling of picked Jhama bricks including ramming and dressing bed to proper level and filling joints with powered earth or local sand.

$$2 \times 5.26 \times 1.200 = 12.62 \text{ Sqm}$$

$$2 \times 2.12 \times 1.200 = 5.10 \text{ Sqm}$$

$$1 \times 4.50 \times 2.750 = 12.38 \text{ Sqm}$$

$$\text{Steps } 1 \times 1.50 \times 0.750 = 1.13 \text{ Sqm}$$

31.23 Sqm @ Rs. 326.00 / Sqm Rs. 10181.00

Building Works PWD (WB)

- 3 Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement, if any, in ground floor as per relevant IS codes.

$$2 \times 5.26 \times 1.20 \times 0.100 = 1.26 \text{ Cum}$$

$$2 \times 2.12 \times 1.20 \times 0.100 = 0.51 \text{ Cum}$$

$$\text{Steps } 1 \times 1.50 \times 0.75 \times 0.100 = 0.11 \text{ Cum}$$

1.88 Cum @ Rs. 5359.18 / Cum Rs. 10075.00

Building Works PWD (WB)

- 4 Ordinary mix cement concrete (1:1.5:3) M20 with graded stone chips (20 mm down excluding shuttering and reinforcement if any in ground floor as per IS456 2000.

Lintel

$$2 \times 4.75 \times 0.25 \times 0.150 = 0.36 \text{ Cum}$$

$$2 \times 3.00 \times 0.25 \times 0.150 = 0.23 \text{ Cum}$$

Chajja

$$2 \times 4.75 \times 0.45 \times 0.075 = 0.32 \text{ Cum}$$

$$2 \times 3.00 \times 0.45 \times 0.075 = 0.20 \text{ Cum}$$

1.11 Cum @ Rs. 5853.02 / Cum Rs. 6497.00

Building Works PWD (WB)

Page- 43 , Item- 40 , 9th Corrigenda



reinforcement for reinforced concrete work in all sorts of structures including distribution bars, stirrups, binders etc initial straightening and removal of loose rust (if necessary), cutting to requisite length, hooking and bending to correct shape, placing in proper position and binding with 16 gauge black annealed wire at every intersection, complete as per drawing and direction.

(i) Tor steel/Mild Steel

II. JSW/JSPL/SHYAM/

SRMB/BMASL/ELECTROSTEEL/SSL

1.00 % of Cement concrete 1:1.5:3 voloum = 0.090 Mt @ Rs. 55394.00 / Mt Rs. 4985.00

Building Works PWD (WB)

Page - 42 , Item 36

- 6 Hire and labour charges for shuttering with centering and necessary staging upto 4 m using approved stout props and thick hard wood planks of approved thickness with required bracing for concrete slabs, beams and columns, lintels curved or straight including fitting, fixing and striking out after completion of works (upto roof of ground floor)  
(f) 25 mm to 30 mm shuttering without staging in foundation

$$2 \times 2 \times 5.26 \times 0.100 = 2.10 \text{ Sqm}$$

$$2 \times 2 \times 2.12 \times 0.100 = 0.85 \text{ Sqm}$$

2.95 Sqm @ Rs. 205.00 / Sqm Rs. 605.00

(a) 25 mm to 30 mm thick wooden shuttering as per decision & direction of Engineer-In-Charge

Lintel  $2 \times 2 \times 4.75 \times 0.150 = 2.85 \text{ Sqm}$

$$2 \times 2 \times 3.00 \times 0.150 = 1.80 \text{ Sqm}$$

Chajja  $2 \times 1 \times 4.75 \times 0.450 = 4.28 \text{ Sqm}$

$$2 \times 1 \times 3.00 \times 0.450 = 2.70 \text{ Sqm}$$

side  $2 \times 1 \times 4.75 \times 0.075 = 0.71 \text{ Sqm}$

$$2 \times 1 \times 3.00 \times 0.075 = 0.45 \text{ Sqm}$$

12.79 Sqm @ Rs. 330.00 / Sqm Rs. 4221.00

Building Works PWD (WB)

Page - 15 , Item 8 3rd Corrigenda

- 7 Brick work with 1st class bricks in cement mortar (1:6)

(a) In foundation and plinth

$$2 \times 5.00 \times 0.50 \times 0.150 = 0.75 \text{ Cum}$$

$$2 \times 2.25 \times 0.50 \times 0.150 = 0.34 \text{ Cum}$$

$$2 \times 4.875 \times 0.375 \times 0.150 = 0.55 \text{ Cum}$$

$$2 \times 2.375 \times 0.375 \times 0.150 = 0.27 \text{ Cum}$$

$$2 \times 4.750 \times 0.250 \times 0.600 = 1.43 \text{ Cum}$$

$$2 \times 2.500 \times 0.250 \times 0.600 = 0.75 \text{ Cum}$$

Steps  $1 \times 1.50 \times 0.25 \times 0.450 = 0.17 \text{ Cum}$

$$1 \times 1.50 \times 0.25 \times 0.300 = 0.11 \text{ Cum}$$

4.37 Cum @ Rs. 4882.70 / Cum Rs. 21337.00

(b) In superstructure, ground floor

Pillar  $6 \times 0.25 \times 0.25 \times 2.100 = 0.79 \text{ Cum}$

0.79 Cum @ Rs. 5105.70 / Cum Rs. 4034.00

Building Works PWD (WB)

Page - 2 , Item - 4

filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity)

$$2 \times 5.26 \times 0.625 \times 0.475 = 3.12 \text{ Cum}$$

$$2 \times 2.12 \times 0.625 \times 0.475 = 1.26 \text{ Cum}$$

4.38 Cum @ Rs. 599.61 / Cum Rs. 2626.00

Building Works PWD (WB)

Page- 102 , Item- 5

- 12 Labour for hoisting and placing in proper position (up to 1st floor level) departmental R.S. joists, channels, angles. Tees, plates etc. including fitting and fixing same with bolts and nuts, if necessary (but excluding cost of such bolts and nuts)

40mm 2.9mm thick

$$3 \times 1 \times 3.00 = 9.00 \text{ Meter}$$

$$3 \times 2 \times 2.05 = 12.30 \text{ Meter}$$

$$3 \times 1 \times 0.90 = 2.70 \text{ Meter}$$

$$3 \times 2 \times 0.875 = 5.25 \text{ Meter}$$

$$3 \times 2 \times 0.49 = 2.94 \text{ Meter}$$

$$7 \times 2 \times 4.75 = 66.50 \text{ Meter}$$

98.69 Meter

$$@ 3.23 \text{ Kg/m} = 318.77 \text{ Kg}$$

$$= 318.77 \text{ Kg}$$

= 3.19 Qntl @ Rs. 412.00 / Qntl Rs. 1314.28

Building Works PWD (WB)

Page- 81 , Item- 9

- 13 Galvanised corrugated iron sheet work (excluding the supporting frame work) fitted and fixed with 10 mm. dia J or L hook-bolts, limpet and bitumen washers and putty complete with 150 mm. end lap and one corrugation minimum side lap. (Payment to be made on area of finished work)(GCI sheet to be supplied by contractor)

(i) In Roof:-

a) With 0.63 mm thick sheet

$$2 \times 4.750 \times 2.05 = 19.48 \text{ Sqm}$$

19.48 Sqm @ Rs. 644.00 / Sqm Rs. 12545.12

$$= \text{Rs. } 78942.40$$

$$\text{G.S.T. @ } 18\% = \text{Rs. } 14210.00$$

$$\text{Rs. } 93152.40$$

$$\text{Labour Welfare Cess @ } 1\% = \text{Rs. } 932.00$$

$$\text{Rs. } 94084.40$$

$$\text{Contingency @ } 3\% = \text{Rs. } 2795.00$$

$$\text{Total Rs. } 96879.40$$

$$= \text{Rs. } 96879.00$$

Rupees NinetySix Thousand Eight Hundred SeventyNine Only

**VETTED**


The estimated vetted by me accordingly by the B.O.C. meeting No. 22 dated 27/06/2023

*[Signature]*  
S.A.E.  
Beldanga Municipality

*[Signature]*  
20/07/2023  
S.A.E.  
Beldanga Municipality


*[Signature]*  
(Anuradha Hazra (Banerjee)  
Chairperson  
Beldanga Municipality

Page - 3 of 5

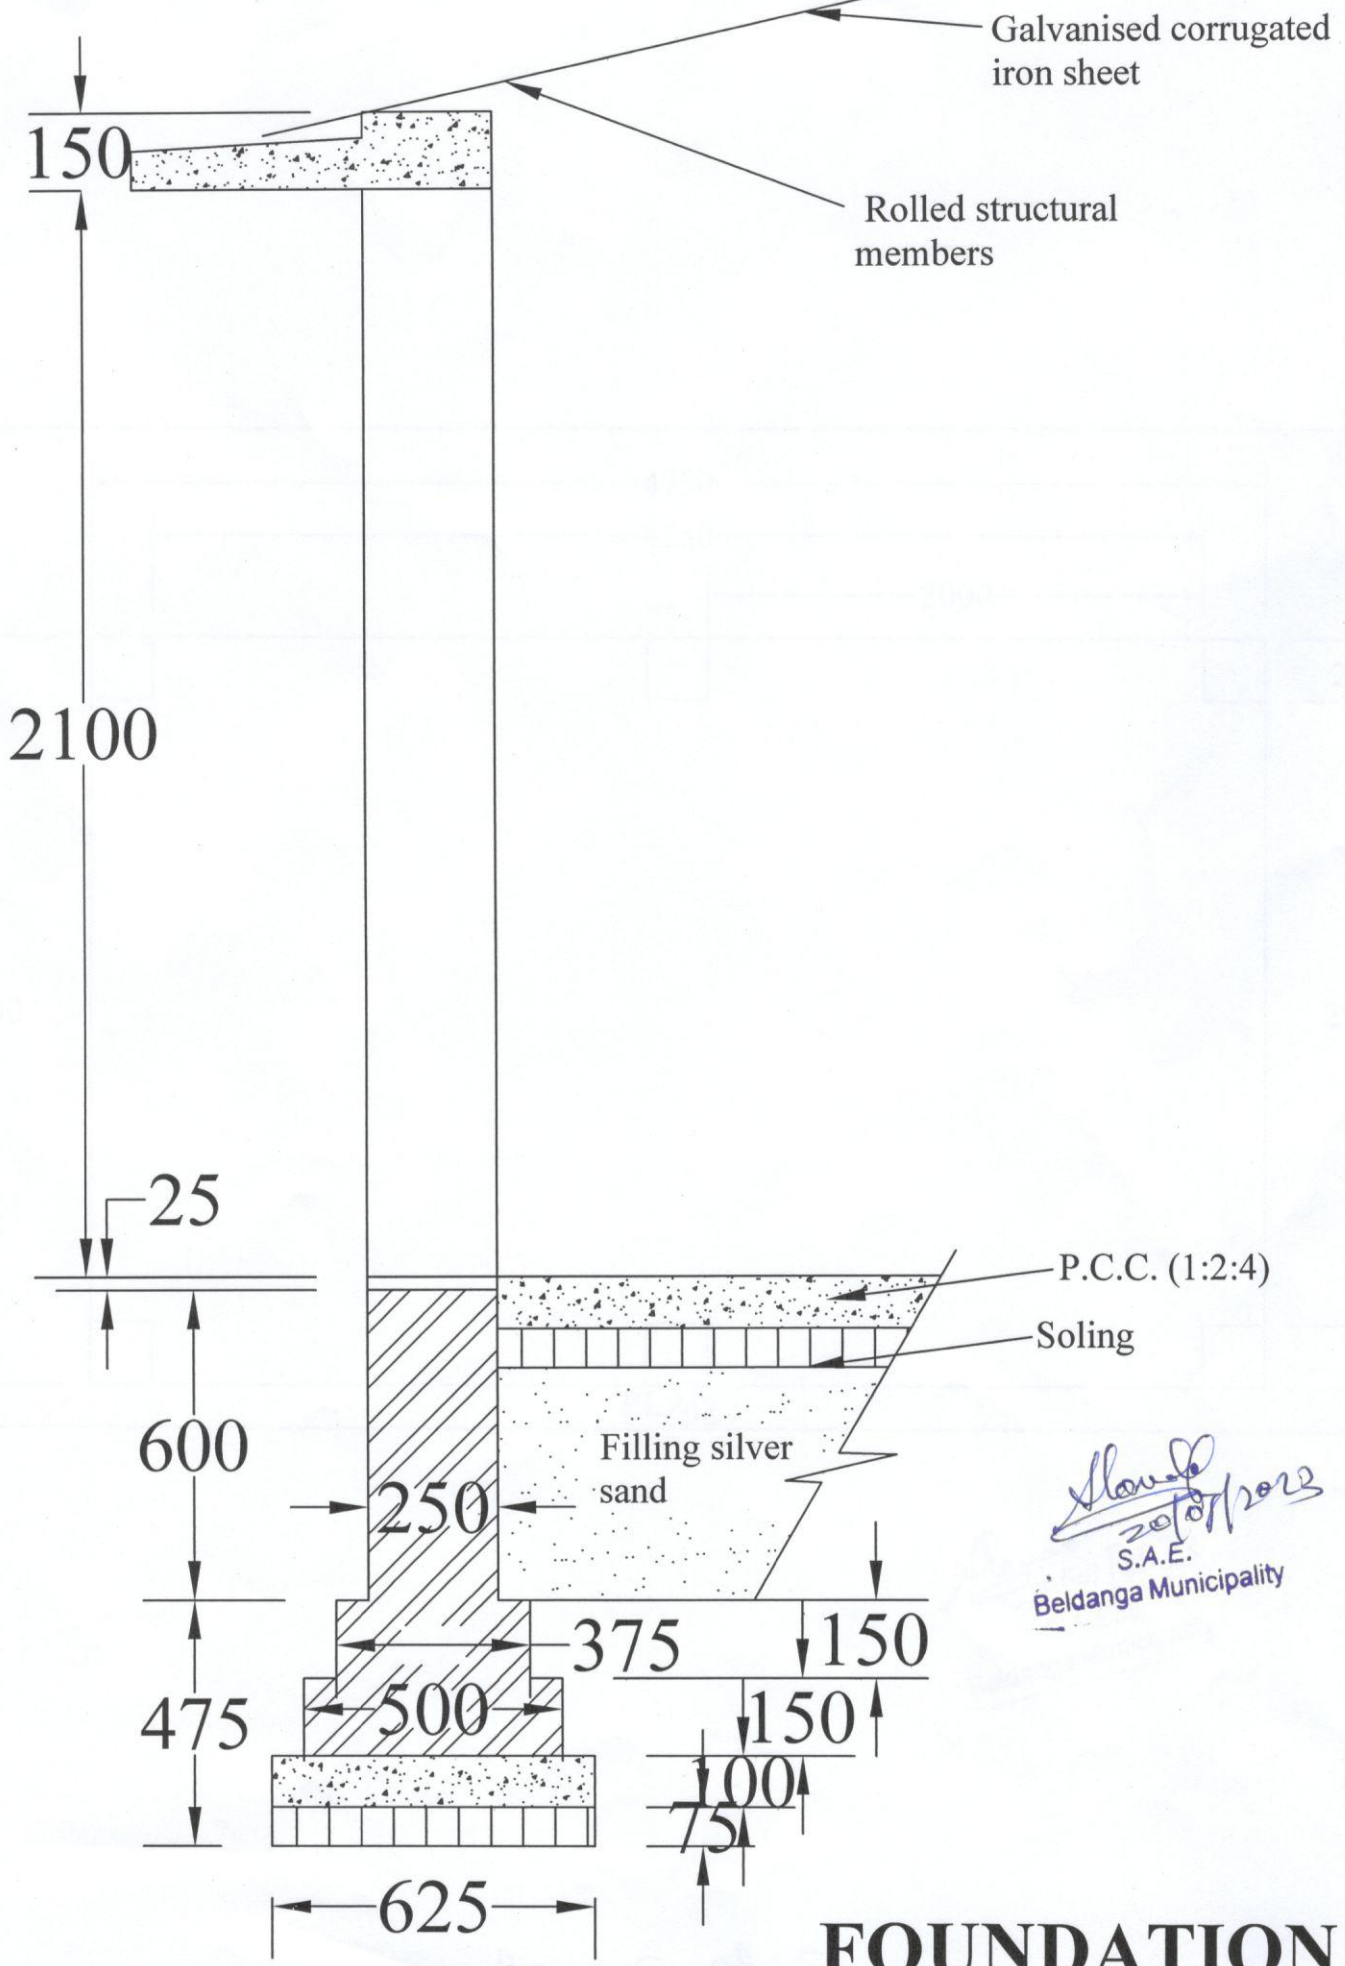

# FOUNDATION

Attestation of the Survey of the land of the above mentioned person at the office of the Surveyor, Tirupati, Andhra Pradesh, on the date of the survey, viz., 20/07/2023, Khata No. 100/100/100, Beldanga, Tirupati, Andhra Pradesh.

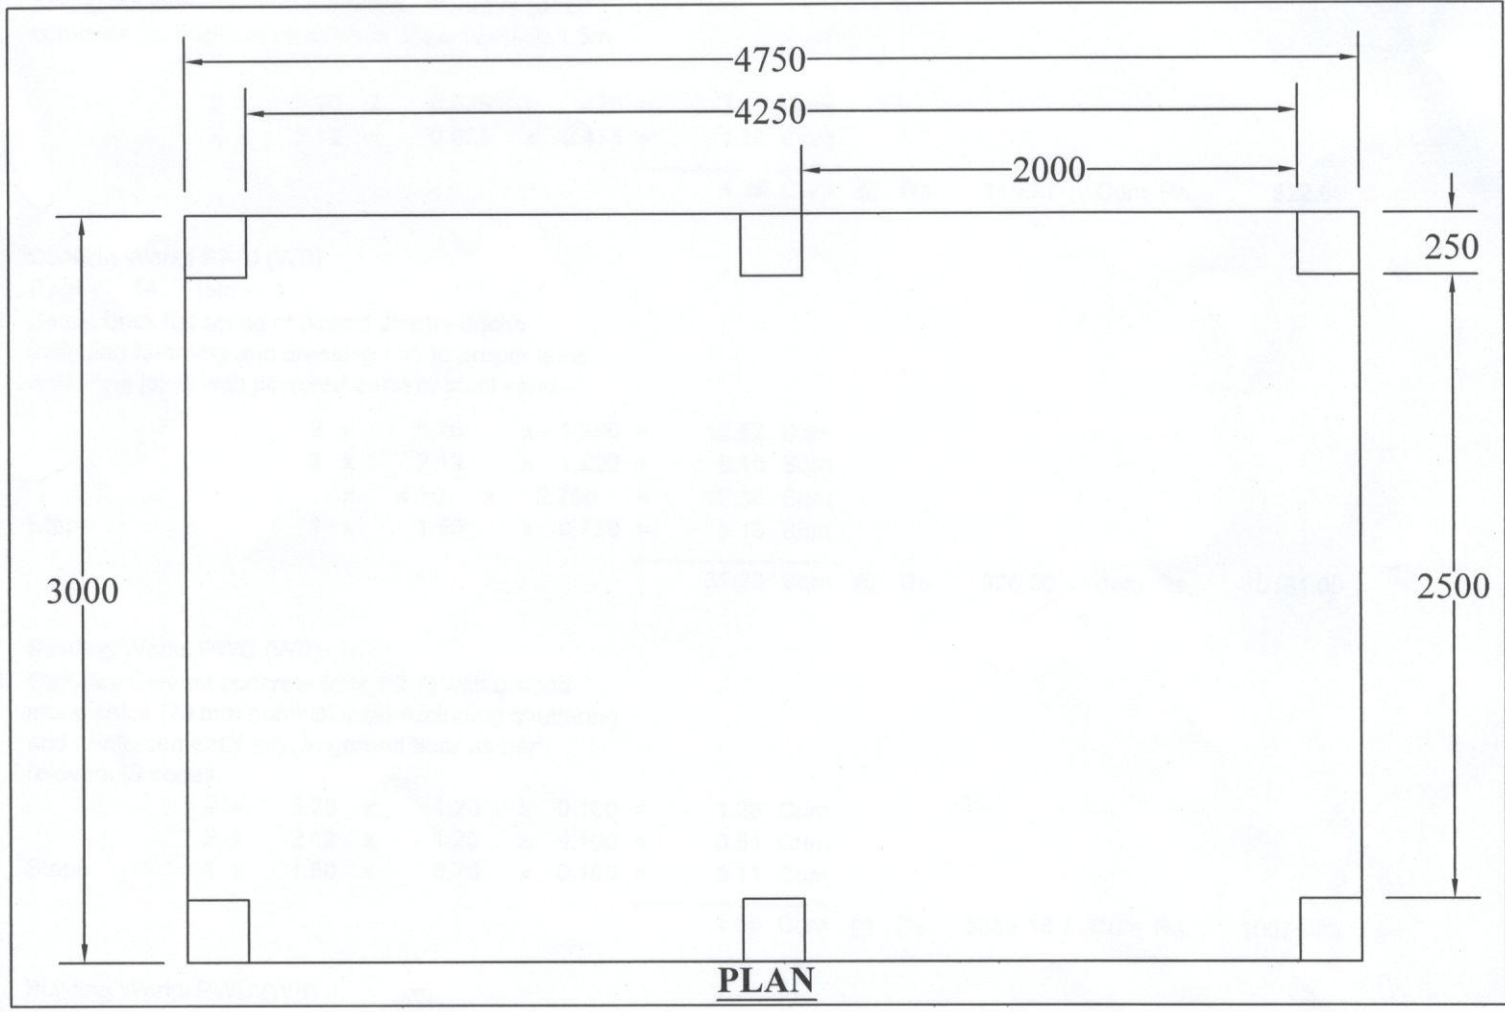

*Alouda*  
20/07/2023  
S.A.E.  
Beldanga Municipality